

acrylic diffuser




microglow



suspended companion

DIMENSIONAL DATA

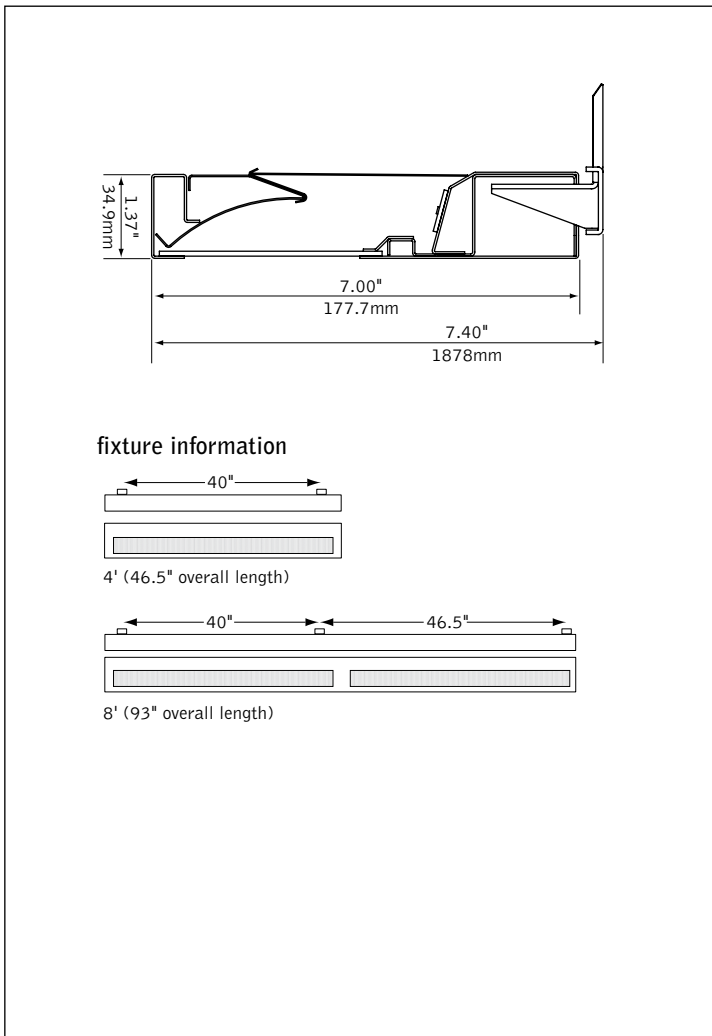

FEATURES


Low profile wall mount direct/indirect LED luminaire.

MicroGlow lens offers cutoff & brightness control to support comfortable environments.

Sleek rectilinear housing only 1.4" high.

Hidden mounting bracket creates the appearance of a floating luminaire.


PERFORMANCE

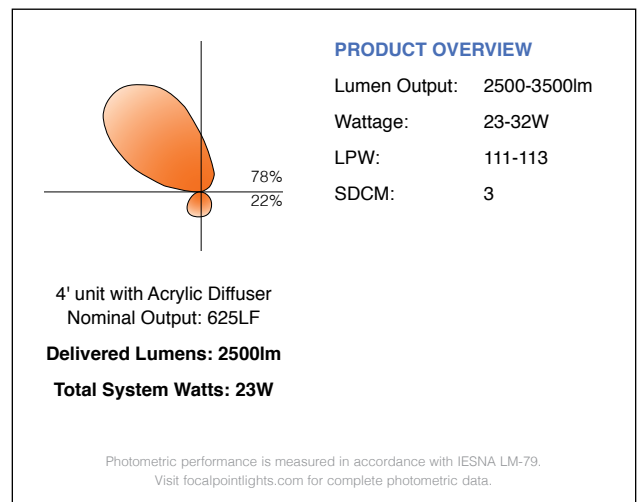

fixture:

project:

DETAILS

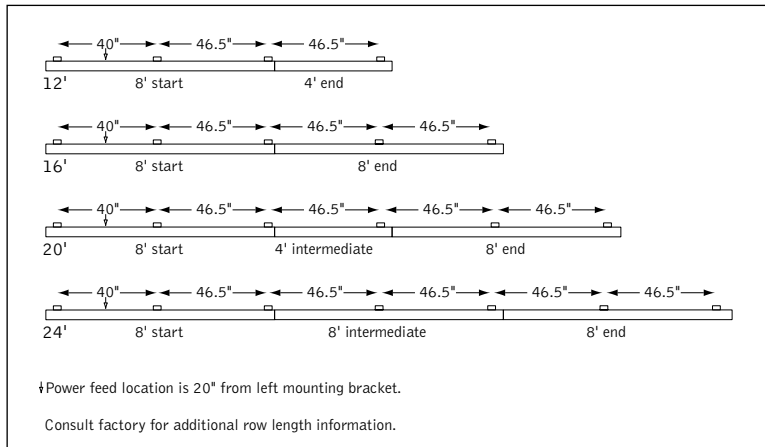

SPECIFICATIONS

LED Systems

Linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. Available in 3000K, 3500K, 4000K with CRI>80, 3SDCM. LED boards and drivers are replaceable.

Construction

One-piece 20 Ga. steel housing. Steel end caps attach flush to housing. For row installation, internal brackets form hairline joint. All luminaires are provided with mounting brackets. 4' unit weight: 22 lbs., 8' unit weight: 40 lbs.

Optic

Reflector fabricated of 22 Ga. steel finished in high reflectance matte white. 0.125" thick acrylic lens. Dust cover standard.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor > .9.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment. Canopy finished in Matte Satin White.

Lumen Maintenance

Reported: L70 at 60,000 hours Calculated: L70 at 130,000 hours
 Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5 year limited warranty.

4' PERFORMANCE CHART

Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
625LF	2500	23	113
750LF	3000	27	112
875LF	3500	32	111

Based on 3500K. Color Temperature multipliers: 3000K - 1.035, 4000K - 0.975. *Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

ORDERING

Fixture Series	FTWLW	FTWLW
Twelve LED	FTWLW	
Shielding		
Acrylic Diffuser	AC	
MicroGlow Prismatic Lens	MG	
Lumen Output		
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
Color Temperature		
3000K	30K	
3500K	35K	
4000K	40K	
Circuits		
Single Circuit	1C	
Voltage		
UNV 120/277 Volt	UNV	
347 Volt <small>(LD1 only)</small>	347	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming	LH1	
Lutron 5-Series EcoSystem (LDE5) - 5% Dimming	LU5	
DALI - 1% Dimming	D11	
Step Dimming <small>(Not available with 625LF)</small>	SD5	
Mounting		
Wall Mount	WM	
Finish		
Titanium Silver	TS	
Matte Satin White	WH	
Fixture Run Length		
	4'	4'
	8'	8'
	12' (8'+4')	12'
	16' (8'+8')	16'
	20' (8'+4'+8')	20'
	24' (8'+8'+8')	24'

(Individual units may not be field modified for continuous row mount)