



perforated



slotted




solid



wall mount  
companion

## DIMENSIONAL DATA

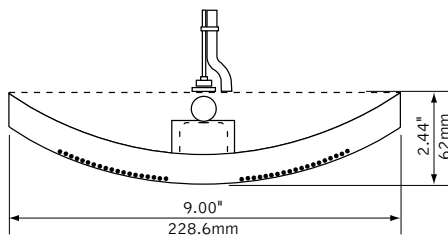


### lamping options



T5 LAMPS






T5HO LAMPS



T8 LAMPS

### fixture information



## FEATURES


Suspended linear indirect fluorescent with contoured housing and end caps.

One-piece steel housing with 5" die-cast end caps.

Housing available up to 12' lengths with two-point suspension.

Verve™ is an excellent choice for any open office application.

## PERFORMANCE



Perforated Housing  
1-Lamp T5HO

**97.4% Efficient**

**1150 cd @ 180°**

### PRODUCT OVERVIEW

Lumen Output: 5309-12754lm

Wattage: 62-177W


Lamping: T5, T5HO, T8

Visit [focalpointlights.com](http://focalpointlights.com) for complete photometric data.

fixture:

project:

### SUSPENSION INFORMATION

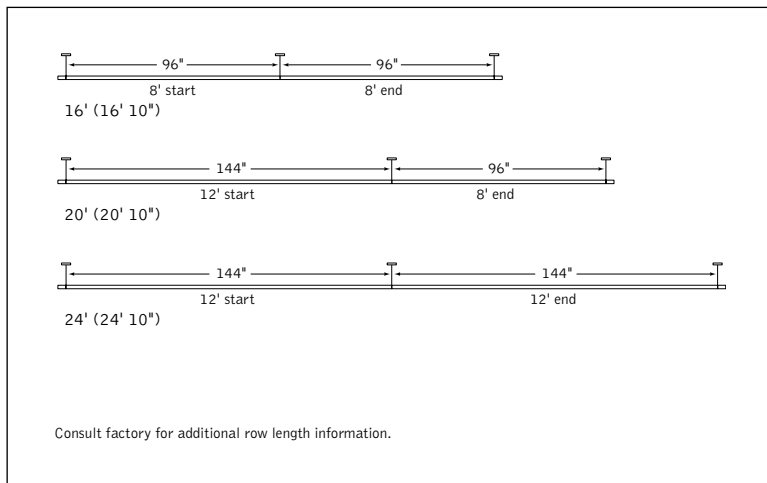

### SPECIFICATIONS

#### Construction

One-piece 20 Ga. steel housing available solid or with perforated or slotted pattern. Perforated or slotted housing includes white acrylic insert. Die-cast 5" end cap standard. Optional short 1" end cap also available. For row installation, internal brackets form hairline joint. Standard lengths are available in 4', 8' and 12'. All luminaires are provided with single point aircraft cable suspension mounted on 48", 96" or 144" centers. 4' unit weight: 20 lbs., 8' unit weight: 30 lbs., 12' unit weight: 46 lbs.

#### Optic

Die-formed 24 Ga. steel reflector, finished in high reflectance white powder coat (93% min. reflectance).

#### Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Factory installed SJT power cord at feed location is included. Electronic ballasts are thermally protected and have a Class "P" rating. Optional dimming ballasts available.

#### Labels

UL and cUL listed.

#### Finish

Polyester powder coat applied over a multi-stage pre-treatment.. Canopy finished in Matte Satin White.

### ORDERING

<b>Fixture Series</b>	Verve II	FV2S	<b>FV2S</b>
<b>Shielding</b>			
Perforated Housing		PS	
Slotted Housing		SL	
Solid Housing		SD	
<b>Lamping</b>			
2 Lamp T5		2T5	
3 Lamp T5		3T5	
1 Lamp T5HO		1T5HO	
2 Lamp T5HO		2T5HO	
3 Lamp T5HO		3T5HO	
2 Lamp T8		2T8	
3 Lamp T8		3T8	
<b>Circuit</b>			
Single Circuit		1C	
Dual Circuit		2C	
<small>(Multiple lamp luminaires only)</small>			
<b>Voltage</b>			
120 Volt		120	
277 Volt		277	
347 Volt		347	
<small>(Consult factory for dimming options)</small>			
120/277 UNV		UNV	
<small>(Not available with 1-lamp T5HO dimming or EM)</small>			
<b>Ballast</b>			
Electronic Program Start <10% THD		S	
0-10V		D7	
Lutron 1% 3-wire		DH	
Lutron 1% H-Series		DK	
<b>Mounting</b>			
24" Cable Suspension		C24	
48" Cable Suspension		C48	
96" Cable Suspension		C96	
<small>(Add "P" for Chicago plenum. Eg: CP12) (Specify one of the following in place of "C" J - for 2' canopies at non-feed locations. CS - for sloped ceilings.)</small>			
<b>Factory Options</b>			
Dust Cover		DC	
Emergency Circuit		*EC	
Emergency Battery Pack		*EM	
HLR/GLR Fuse		FU	
Short 1" end cap		SE	
Include 3000K Lamp*		L830	
Include 3500K Lamp*		L835	
Include 4100K Lamp*		L841	
<small>(Sensor options available - consult factory)</small>			
<b>Finish</b>			
Matte White Housing		WH	
Titanium Silver		TS	
<b>Luminaire Length</b>			
4'		4'	
8'		8'	
12'		12'	
16' (8'+8')		16'	
20' (12'+8')		20'	
24' (12'+12')		24'	