

# BOUQUET 4428-10-MAD

PROJECT PROJET

SPEC TYPE

NOTES




SHADE QUANTITY 7X

SHADE QUANTITY 13X

4428-10-MAD

4428-10-MAD

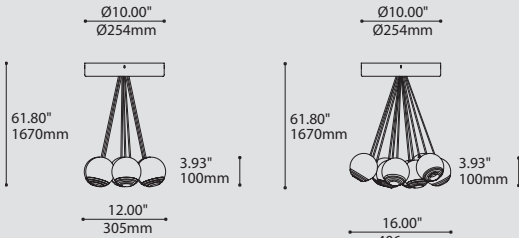

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE 4428-10-MAD

4428-10-MAD BOUQUET ROLO

SHADE QUANTITY QUANTITÉ D'ABAT-JOUR

7 OR 13 SHADES

7 7 X SHADES

13 13 X SHADES

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

LED.4 4W, LED

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

FOR LED ONLY

30 3000K

35 3500K

40 4000K

ANGLE BEAM ANGLE DE DIFFUSION

17 17°

48 48°

VOLTAGE VOLTAGE

120V 120 VOLT

277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

FOR LED ONLY

DV 0-10V DIMMING (120-277V)

DP PHASE DIMMING (120V ONLY)

LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE.

CABLE CABLE

C CLEAR CABLE, FIELD ADJUSTABLE

C

CABLE LENGTH LONGUEUR DE CABLE

60 60" CABLE (STD LENGTH)

\*\* CUSTOM CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

STRUCTURE FINISH FINI STRUCTURE

WHE\* WHITE FINE TEXTURE

\*CENTRAL PIECE IS ALWAYS BLACK

WHE

DIFFUSER FINISH FINI DIFFUSEUR

BLK BLACK

CHR CHROME

HEATSINK FINISH FINI RADIATEUR

SAA SATIN ALUMINUM ANODIZED

SAA

ACCESSORY ACCESSOIRE

4901 HOOK

4902 LOOP

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

**BIM** **DIM** **IES** **LED**

**DESIGN:** Offered in a wide variety of configurations, Bouquet is a cluster of 7 or 13 fixtures all emerging from the matte black recessed center hole of a white canopy. Bouquet can be paired with the adjustable cable holder accessory, Loop (4902), which can be easily installed and removed.

**INSTALLATION:** Bouquet mounts on standard junction boxes and is supplied with support hooks for easy installation.

**LIGHT SOURCE:** Available with incandescent, halogen or LED light sources depending on the fixtures. Dimming available.

**STRUCTURE:** Spun steel chrome plated canopy matte black center hole to hide mounting hardware.

**CERTIFIED:** c-CSA-us


**CONCEPTION:** Offert dans une grande variété de configurations, Bouquet est un groupe de 7 ou 13 luminaires émergeant du trou encastré au centre d'un pavillon blanc. Bouquet peut être jumelé avec l'accessoire serre-câble ajustable Loop (4902), qui peut être facilement installé ou retiré de l'assemblage.

**INSTALLATION:** Des crochets de support sont fournis pour faciliter l'installation sur une boîte de jonction standard.


**SOURCE LUMINEUSE:** Utilisation avec sources lumineuses DEL ou incandescentes avec des options de gradation.

**STRUCTURE:** Pavillon en acier repoussé et chromé avec section centrale noire matte pour camoufler les supports.

**CERTIFIÉ:** c-CSA-us

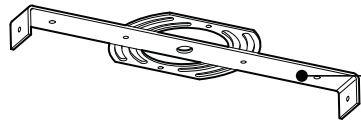


**EASY INSTALLATION**  
Mounts to standard junction box with added mounting points to reinforce installation

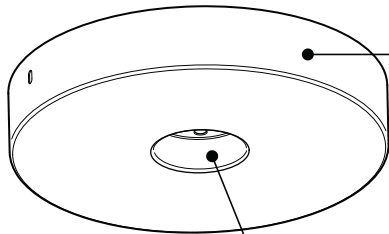


**SIMPLE CANOPY**  
Chrome plated canopy with plenty of room to house all electrical components for quick assembly

**CENTER PIECE**  
Matte black recessed center hole

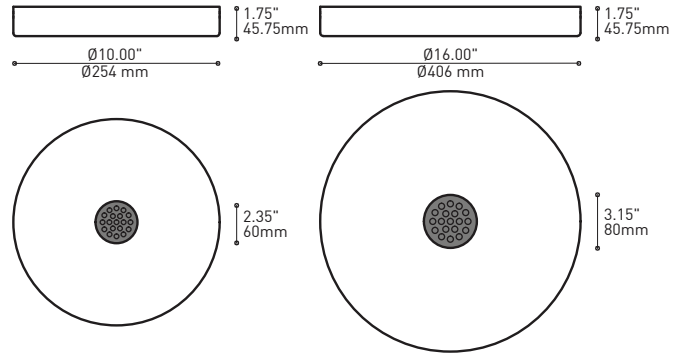


Wide variety of configurations





## ACCESSORIES


Allows more creativity

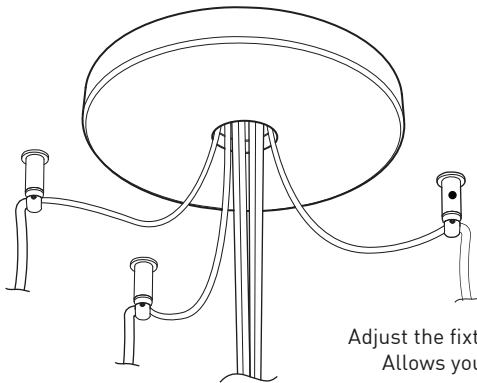


**HOOK 4901**  
Adjust the fixture to the desired height  
Allows you to make big statements

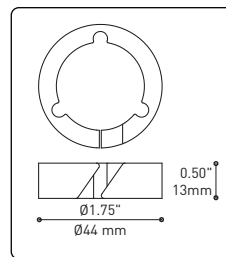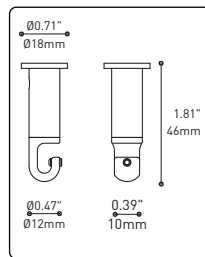


**LOOP 4902**  
Can straighten, lock height or group up to 19 power cables  
Can be installed after fixture installation

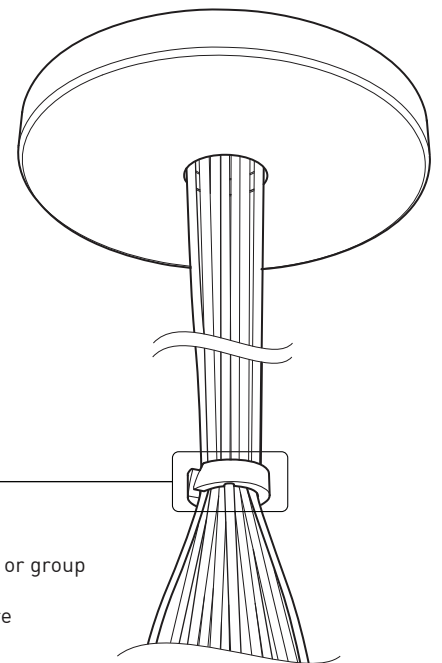

FIXTURE	CODE	Ø		LIGHT SOURCE		MAX. WATTAGE					
		10	16	LED	INC	LED			INC		
		Nb. FIXTURE				7	13	19	7	13	19
ALVER	MCC	7ou13	19	X	X	28W	52W	76W	420W	780W	1140W
ROLO PENDANT	MAD	7ou13	19	X		28W	52W	76W			
SPROKET	CFD	7ou13	19	X		28W	52W	76W			
MEHA	UAC	7ou13	19	X		28W	52W	76W			
FACET	UFC	7ou13	19	X		28W	52W	76W			
SLIM STACK	SLS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
STUBBY STACK	STS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
MIKA	RAP	7	13ou19	X		63W	117W	171W			
MIKA	RAQ	7	13ou19	X		91W	169W	247W			

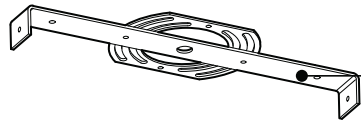


**FACILE D'ASSEMBLAGE**  
 -Installation sur boîte de jonction standard avec des points d'ancrage multiples  
 -Crochets de support fournis pour faciliter l'installation

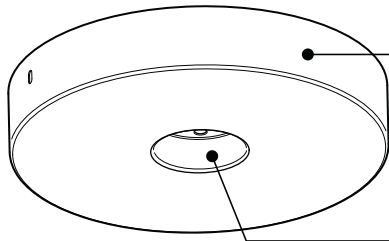


**PAVILLON SIMPLE**  
 Pavillon en acier repoussé et chromé avec espace nécessaire pour accueillir toutes les composants internes

**SECTION CENTRALE**  
 Pièce noir matte servant à camoufler les supports des fils


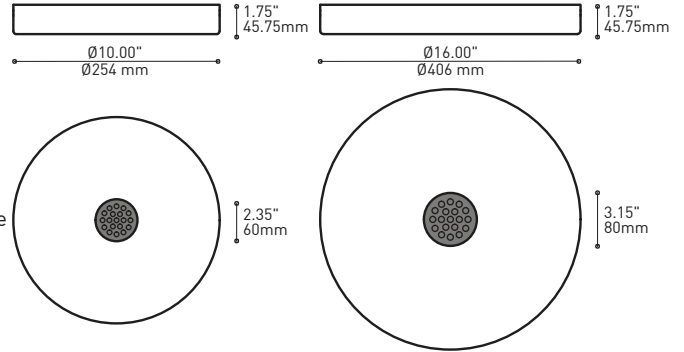


Grande variété de configurations




## ACCESSOIRES

Permet une plus grande créativité

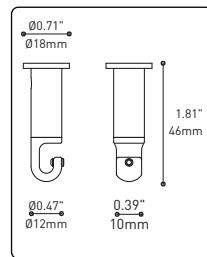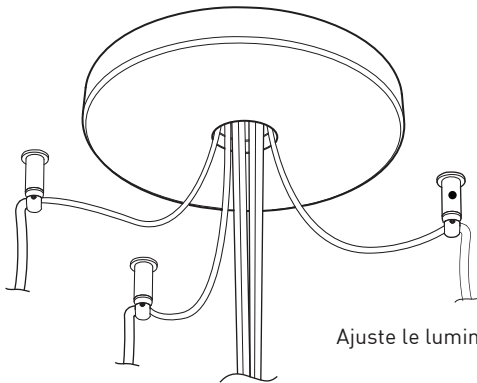


**CROCHET 4901**

Ajuste le luminaire à la hauteur désirée

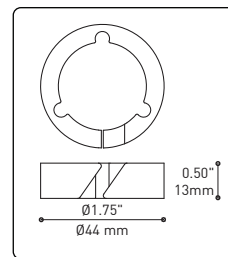

**ANNEAU 4902**

Redresse, organise et regroupe jusqu'à 19 câbles  
 Peut-être installé après l'installation du luminaire

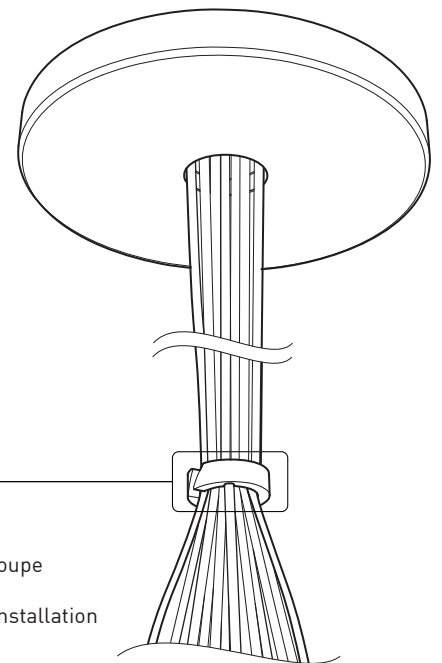

FIXTURE	CODE	SOURCE LUM.		MAX. WATTAGE							
		Ø 10	Ø 16	LED			INC				
		Nb. FIXTURE	LED	INC	7	13	19	7	13	19	
ALVER	MCC	7ou13	19	X	X	28W	52W	76W	420W	780W	1140W
ROLO PENDANT	MAD	7ou13	19	X		28W	52W	76W			
SPROKET	CFD	7ou13	19	X		28W	52W	76W			
MEHA	UAC	7ou13	19	X		28W	52W	76W			
FACET	UFC	7ou13	19	X		28W	52W	76W			
SLIM STACK	SLS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
STUBBY STACK	STS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
MIKA	RAP	7	13ou19	X		63W	117W	171W			
MIKA	RAQ	7	13ou19	X		91W	169W	247W			