


# BOUQUET 4428-10-MCC

PROJECT PROJET
SPEC TYPE
NOTES

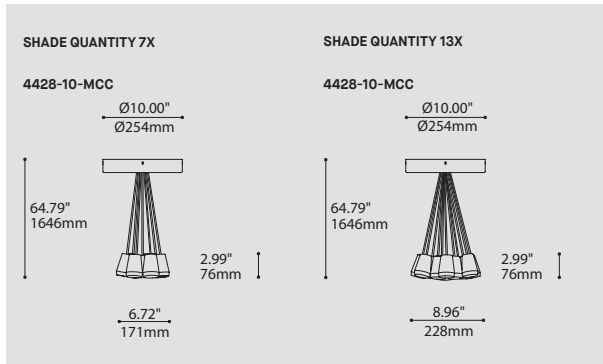

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>	4428-10-MCC BOUQUET ALVER	4428-10-MCC
<b>SHADE QUANTITY QUANTITÉ D'ABAT-JOUR</b>	7 OR 13 SHADES 7 7 X SHADES 13 13 X SHADES	
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO) INC.60 60W, INC, A19 / B10 / G30 / HAL T10, MEDIUM BASE (120V ONLY) LED.4 4W, LED	
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>	FOR LED ONLY 30 3000K 35 3500K 40 4000K	
<b>ANGLE BEAM ANGLE DE DIFFUSION</b>	17 17° 48 48°	
<b>VOLTAGE VOLTAGE</b>	120V 120 VOLT 277V 277 VOLT	
<b>DIMMING OPTION OPTION DE GRADATION</b>	FOR LED ONLY DV 0-10V DIMMING (120-277V) DP PHASE DIMMING (120V ONLY) LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.	
<b>CABLE CABLE</b>	C CLEAR CABLE, FIELD ADJUSTABLE	C
<b>CABLE LENGTH LONGUEUR DE CABLE</b>	60 60" CABLE (STD LENGTH) ** CUSTOM CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
<b>STRUCTURE FINISH FINI STRUCTURE</b>	WHE* WHITE FINE TEXTURE *CENTRAL PIECE IS ALWAYS BLACK	WHE
<b>DIFFUSER FINISH FINI DIFFUSEUR</b>	BLK BLACK CHR CHROME	
<b>ACCESSORY ACCESSOIRE</b>	4901 HOOK 4902 LOOP	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

**BIM** **DIM** **IES** **LED**

**DESIGN:** Offered in a wide variety of configurations, Bouquet is a cluster of 7 or 13 fixtures all emerging from the matte black recessed center hole of a white canopy. Bouquet can be paired with the adjustable cable holder accessory, Loop (4902), which can be easily installed and removed.

**INSTALLATION:** Bouquet mounts on standard junction boxes and is supplied with support hooks for easy installation.

**LIGHT SOURCE:** Available with incandescent, halogen or LED light sources depending on the fixtures. Dimming available.

**STRUCTURE:** Spun steel chrome plated canopy matte black center hole to hide mounting hardware.

**CERTIFIED:** c-CSA-us


**CONCEPTION:** Offert dans une grande variété de configurations, Bouquet est un groupe de 7 ou 13 luminaires émergeant du trou encastré au centre d'un pavillon blanc. Bouquet peut être jumelé avec l'accessoire serre-câble ajustable Loop (4902), qui peut être facilement installé ou retiré de l'assemblage.

**INSTALLATION:** Des crochets de support sont fournis pour faciliter l'installation sur une boîte de jonction standard.

**SOURCE LUMINEUSE:** Utilisation avec sources lumineuses DEL ou incandescentes avec des options de gradation.


**STRUCTURE:** Pavillon en acier repoussé et chromé avec section centrale noire matte pour camoufler les supports.

**CERTIFIÉ:** c-CSA-us

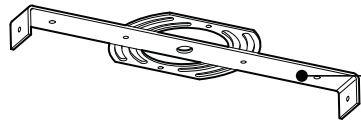

### EASY INSTALLATION

Mounts to standard junction box with added mounting points to reinforce installation



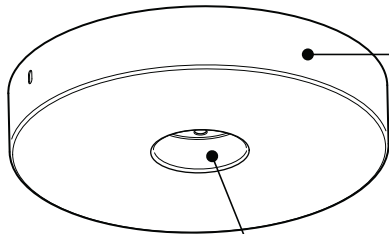


### SIMPLE CANOPY


Chrome plated canopy with plenty of room to house all electrical components for quick assembly

### CENTER PIECE

Matte black recessed center hole

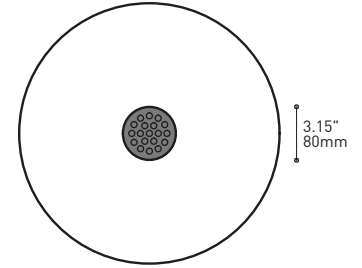



Wide variety of configurations




## ACCESSORIES

Allows more creativity

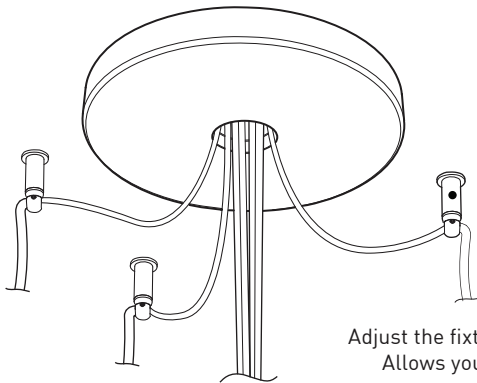


### HOOK 4901

Adjust the fixture to the desired height  
Allows you to make big statements




### LOOP 4902

Can straighten, lock height or group up to 19 power cables  
Can be installed after fixture installation

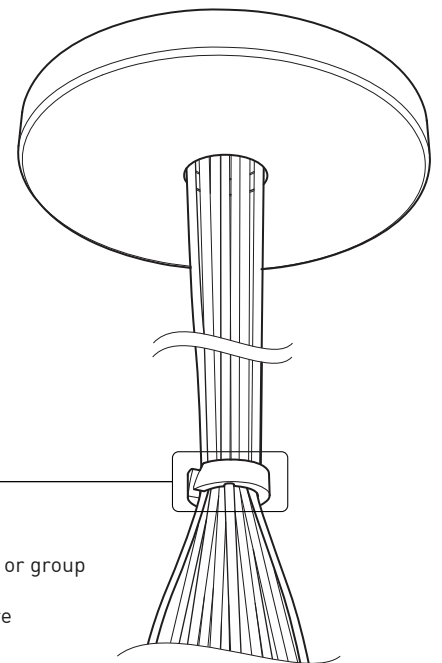


FIXTURE	CODE	Ø		LIGHT SOURCE		MAX. WATTAGE					
		10	16	LED	INC	LED			INC		
		Nb. FIXTURE				7	13	19	7	13	19
ALVER	MCC	7ou13	19	X	X	28W	52W	76W	420W	780W	1140W
ROLO PENDANT	MAD	7ou13	19	X		28W	52W	76W			
SPROKET	CFD	7ou13	19	X		28W	52W	76W			
MEHA	UAC	7ou13	19	X		28W	52W	76W			
FACET	UFC	7ou13	19	X		28W	52W	76W			
SLIM STACK	SLS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
STUBBY STACK	STS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
MIKA	RAP	7	13ou19	X		63W	117W	171W			
MIKA	RAQ	7	13ou19	X		91W	169W	247W			

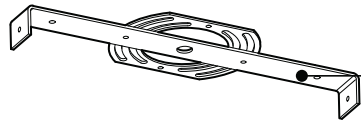

### FACILE D'ASSEMBLAGE

- Installation sur boîte de jonction standard avec des points d'ancrage multiples
- Crochets de support fournis pour faciliter l'installation



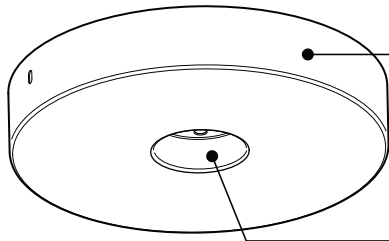


### PAVILLON SIMPLE


Pavillon en acier repoussé et chromé avec espace nécessaire pour accueillir toutes les composants internes

### SECTION CENTRALE

Pièce noir matte servant à camoufler les supports des fils

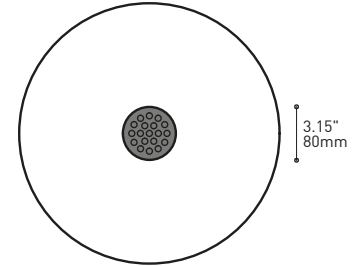



Grande variété de configurations




## ACCESSOIRES

Permet une plus grande créativité

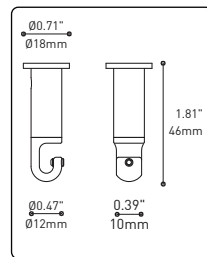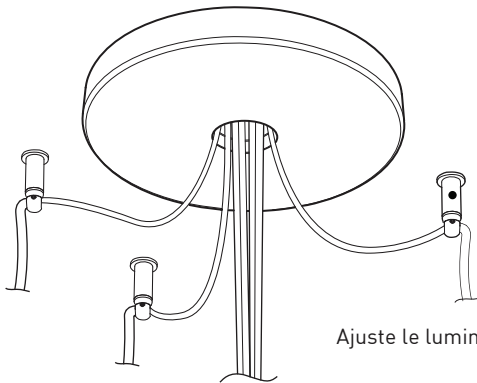


### CROCHET 4901

Ajuste le luminaire à la hauteur désirée

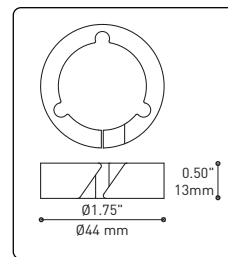

### ANNEAU 4902

Redresse, organise et regroupe jusqu'à 19 câbles  
Peux-être installé après l'installation du luminaire

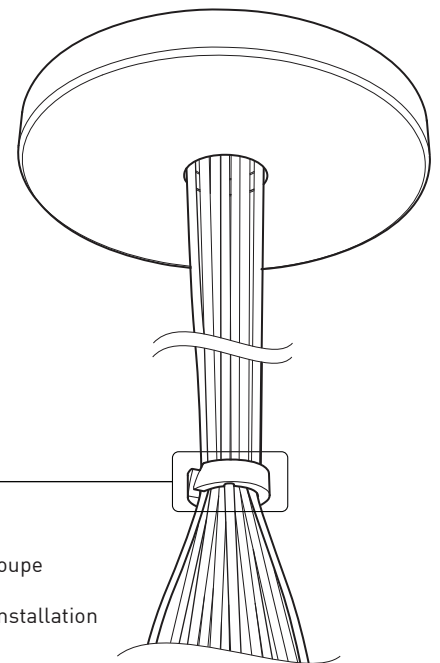

FIXTURE	CODE	SOURCE LUM.		MAX. WATTAGE							
		Ø 10	Ø 16	LED			INC				
				Nb. FIXTURE	LED	INC	7	13	19	7	13
ALVER	MCC	7ou13	19	X	X	28W	52W	76W	420W	780W	1140W
ROLO PENDANT	MAD	7ou13	19	X		28W	52W	76W			
SPROKET	CFD	7ou13	19	X		28W	52W	76W			
MEHA	UAC	7ou13	19	X		28W	52W	76W			
FACET	UFC	7ou13	19	X		28W	52W	76W			
SLIM STACK	SLS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
STUBBY STACK	STS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
MIKA	RAP	7	13ou19	X		63W	117W	171W			
MIKA	RAQ	7	13ou19	X		91W	169W	247W			