

# BOUQUET 4428-16-UAC

PROJECT PROJET
SPEC TYPE
NOTES




## OPTIONS



4901 DETAIL



4902 DETAIL

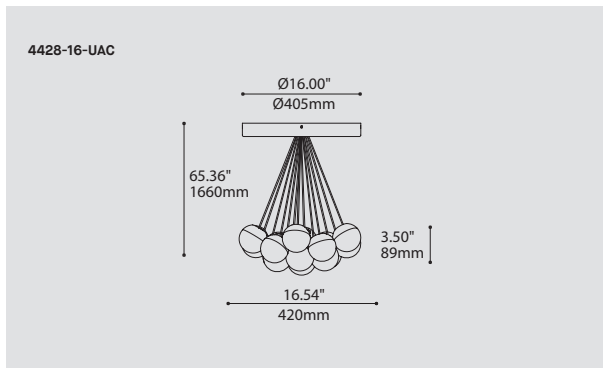


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>	4428-16-UAC BOUQUET MEHA	4428-16-UAC
<b>SHADE QUANTITY QUANTITÉ D'ABAT-JOUR</b>	19 19 X SHADES	19
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO) LED.1 1W, LED LED.4 4W, LED	
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>	FOR LED ONLY 30 3000K 35 3500K 40 4000K	
<b>VOLTAGE VOLTAGE</b>	120V 120 VOLT 277V 277 VOLT	
<b>DIMMING OPTION OPTION DE GRADATION</b>	FOR LED ONLY DV 0-10V DIMMING (120-277V) DP PHASE DIMMING (120V ONLY) LED DIMMING DRIVER IS STANDARD IN THESE PRODUCTS, PLEASE SPECIFY YOUR DIMMING TYPE.	
<b>CABLE CABLE</b>	C CLEAR CABLE, FIELD ADJUSTABLE	C
<b>CABLE LENGTH LONGUEUR DE CABLE</b>	60 60" CABLE (STD LENGTH) ** CUSTOM CABLE LENGTH (PLEASE SPECIFY)* FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
<b>STRUCTURE FINISH FINI STRUCTURE</b>	WHE* WHITE FINE TEXTURE *CENTRAL PIECE IS ALWAYS BLACK	WHE
<b>DIFFUSER FINISH FINI DIFFUSEUR</b>	CLR CLEAR FRO FROSTED	
<b>HEATSINK FINISH FINI RADIATEUR</b>	SAA SATIN ALUMINUM ANODIZED	SAA
<b>ACCESSORY ACCESSOIRE</b>	4901 HOOK 4902 LOOP	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




<b>DESIGN:</b>	Offered in a wide variety of configurations, Bouquet is a cluster of 19 fixtures all emerging from the matte black recessed center hole of a white canopy. Bouquet can be paired with the adjustable cable holder accessory, Loop (4902), which can be easily installed and removed.
<b>INSTALLATION:</b>	Bouquet mounts on standard junction boxes and is supplied with support hooks for easy installation.
<b>LIGHT SOURCE:</b>	Available with incandescent, halogen or LED light sources depending on the fixtures. Dimming available.
<b>STRUCTURE:</b>	Spun steel chrome plated canopy matte black center hole to hide mounting hardware.
<b>CERTIFIED:</b>	c-CSA-us
<b>CONCEPTION:</b>	Offert dans une grande variété de configurations, Bouquet est un groupe de 19 luminaires émergeant du trou encastré au centre d'un pavillon blanc. Bouquet peut être jumelé avec l'accessoire serre-câble ajustable Loop (4902), qui peut être facilement installé ou retiré de l'assemblage.
<b>INSTALLATION:</b>	Des crochets de support sont fournis pour faciliter l'installation sur une boîte de jonction standard.
<b>SOURCE LUMINEUSE:</b>	Utilisation avec sources lumineuses DEL ou incandescentes avec des options de gradation.
<b>STRUCTURE:</b>	Pavillon en acier repoussé et chromé avec section centrale noire matte pour camoufler les supports.
<b>CERTIFIÉ:</b>	c-CSA-us

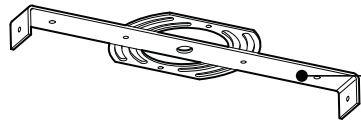

### EASY INSTALLATION

Mounts to standard junction box with added mounting points to reinforce installation

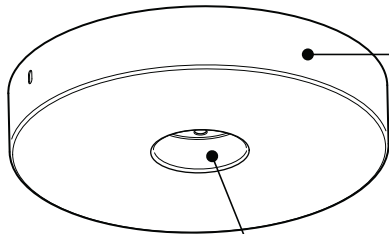


### SIMPLE CANOPY


Chrome plated canopy with plenty of room to house all electrical components for quick assembly

### CENTER PIECE

Matte black recessed center hole


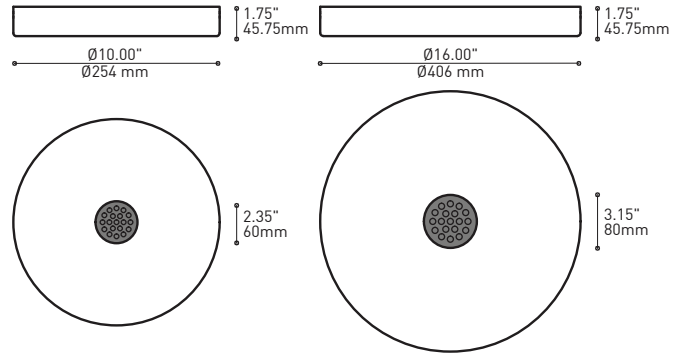


Wide variety of configurations




## ACCESSORIES

Allows more creativity

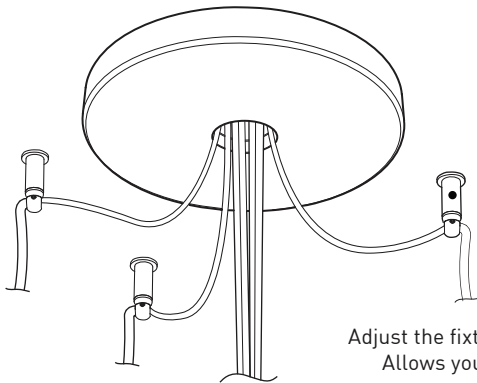


### HOOK 4901

Adjust the fixture to the desired height  
Allows you to make big statements




### LOOP 4902


Can straighten, lock height or group up to 19 power cables  
Can be installed after fixture installation

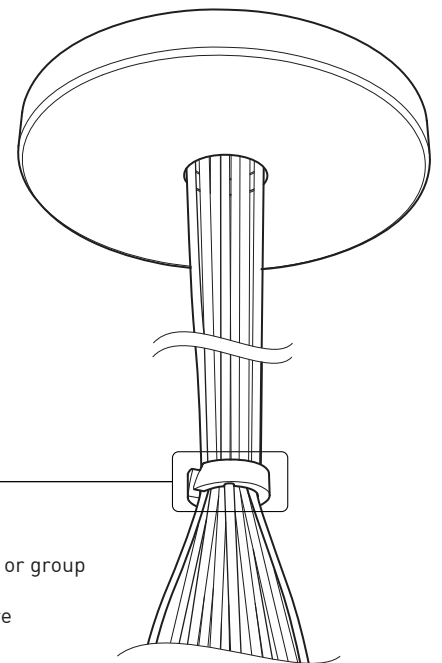

FIXTURE	CODE	Ø		LIGHT SOURCE		MAX. WATTAGE					
		10	16	LED	INC	LED			INC		
		Nb. FIXTURE				7	13	19	7	13	19
ALVER	MCC	7ou13	19	X	X	28W	52W	76W	420W	780W	1140W
ROLO PENDANT	MAD	7ou13	19	X		28W	52W	76W			
SPROKET	CFD	7ou13	19	X		28W	52W	76W			
MEHA	UAC	7ou13	19	X		28W	52W	76W			
FACET	UFC	7ou13	19	X		28W	52W	76W			
SLIM STACK	SLS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
STUBBY STACK	STS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
MIKA	RAP	7	13ou19	X		63W	117W	171W			
MIKA	RAQ	7	13ou19	X		91W	169W	247W			

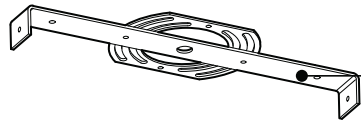


**FACILE D'ASSEMBLAGE**  
 - Installation sur boîte de jonction standard avec des points d'ancrage multiples  
 - Crochets de support fournis pour faciliter l'installation

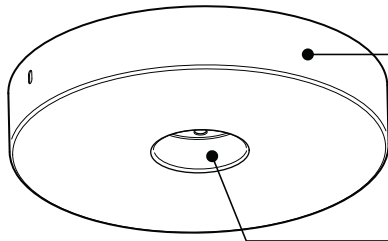


**PAVILLON SIMPLE**  
 Pavillon en acier repoussé et chromé avec espace nécessaire pour accueillir toutes les composants internes

**SECTION CENTRALE**  
 Pièce noir matte servant à camoufler les supports des fils


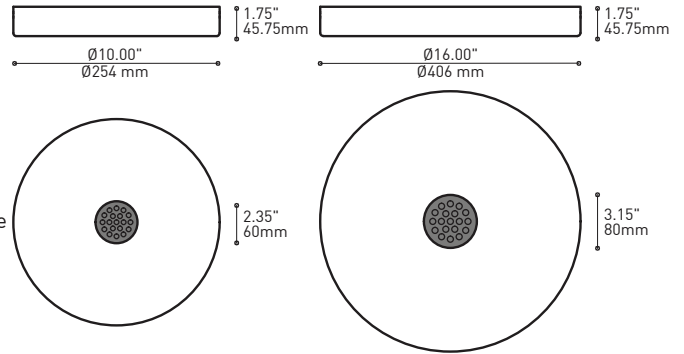


Grande variété de configurations




## ACCESSOIRES

Permet une plus grande créativité

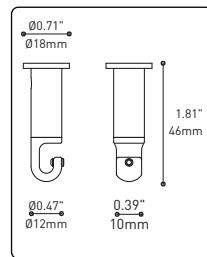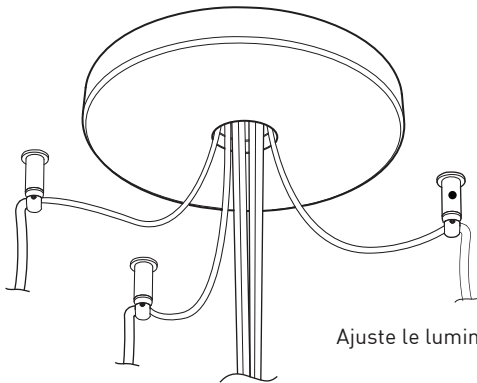


**CROCHET 4901**

Ajuste le luminaire à la hauteur désirée

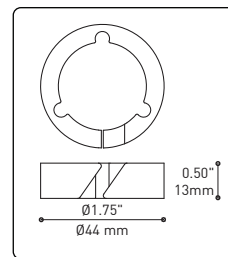

**ANNEAU 4902**

Redresse, organise et regroupe jusqu'à 19 câbles  
 Peut-être installé après l'installation du luminaire

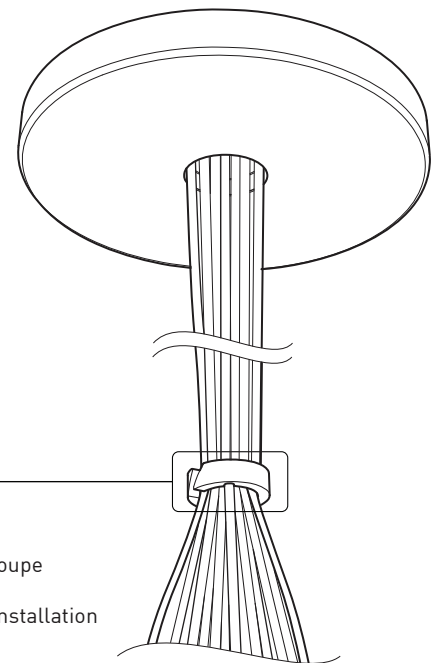

FIXTURE	CODE	SOURCE LUM.		MAX. WATTAGE							
		Ø 10	Ø 16	LED			INC				
				Nb. FIXTURE	LED	INC	7	13	19	7	13
ALVER	MCC	7ou13	19	X	X	28W	52W	76W	420W	780W	1140W
ROLO PENDANT	MAD	7ou13	19	X		28W	52W	76W			
SPROKET	CFD	7ou13	19	X		28W	52W	76W			
MEHA	UAC	7ou13	19	X		28W	52W	76W			
FACET	UFC	7ou13	19	X		28W	52W	76W			
SLIM STACK	SLS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
STUBBY STACK	STS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
MIKA	RAP	7	13ou19	X		63W	117W	171W			
MIKA	RAQ	7	13ou19	X		91W	169W	247W			