



## 3G-2PLI-DI

2" LINEAR DIRECT/INDIRECT  
PENDANT MOUNTED



Narrow 2" aperture with one piece extruded aluminum housing  
Individual or continuous runs available in multiple run configurations  
Direct/Indirect distribution with multiple lumen output options  
Extruded acrylic lens available in flush, 1" and 2" drop lens options  
Drop lenses feature illuminated end caps  
1% dimming standard with several driver options

### ORDERING INFORMATION

<b>PROJECT:</b>	<input type="text"/>	<b>TYPE:</b>	<input type="text"/>
<b>CATALOG #:</b>	<input type="text"/>	<b>DATE:</b>	<input type="text"/>

CAT. NO	LED SYSTEM (DIRECT)	LED SYSTEM (INDIRECT)	CRI	COLOR TEMP	VOLTAGE
<b>3G-2PLI-DI</b>	<b>L1</b> - LOW OUTPUT <b>L2</b> - STANDARD OUTPUT <b>L4</b> - HIGH OUTPUT <b>L___</b> - CUSTOM OUTPUT <small>(SPECIFY TARGET LM/FT)</small>	<b>L1</b> - LOW OUTPUT <b>L2</b> - STANDARD OUTPUT <b>L4</b> - HIGH OUTPUT <b>L___</b> - CUSTOM OUTPUT <small>(SPECIFY TARGET LM/FT)</small>	<b>S80</b> - 80+CRI <small>(STANDARD)</small> <b>H90</b> - 90+CRI	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>UNV</b> - 120V-277V <b>120</b> - 120V <b>347</b> - 347V <small>(0-10V ONLY)</small>

DRIVER	LENS OPTIONS	FINISH	CABLE LENGTH	CIRCUITING	OPTIONS	LENGTH (FEET)
<b>DIM</b> - 0-10V <small>(STANDARD - 100-1%)</small> <b>DHL2</b> - LUTRON <small>(ECO SYSTEM "H" 100-1%)</small> <b>DALI</b> - DALI (100-1%) <b>DO1</b> - 0-10V (100-0.1%)	<b>FL</b> - FLUSH <b>DD1</b> - 1" DROP LENS <b>DD2</b> - 2" DROP LENS  <small>Indirect lens available in flush only</small>	<b>WH</b> - WHITE <small>(STANDARD)</small> <b>SV</b> - SILVER <b>BK</b> - BLACK  <small>All mounting canopies provided in white as standard</small>	<b>60</b> - 60" <b>120</b> - 120"	<b>1C</b> - 1 CIRCUIT <b>2C</b> - 2 CIRCUIT	<b>EM</b> - INTEGRAL EMERGENCY BATTERY (4' SECTION)	<b>S</b> - ___' (STRAIGHT RUN)* <b>L</b> - ___' X ___' (L-SHAPE) <b>U</b> - ___' X ___' X ___' (U-SHAPE) <b>R</b> - ___' X ___' (RECTANGLE/SQUARE) <b>T</b> - ___' X ___' (T-SHAPE) <b>X</b> - ___' X ___' (X-SHAPE) <b>CUS</b> - CUSTOM LAYOUT  <small>*Individual units available in 2', 3', 4', 5', 6', and 8' Continuous runs available in 1' increments</small>

### PERFORMANCE CHART (Based on 3500K, 4' length)

LENS OPTIONS	LED SYSTEM	SYSTEM WATTS (PER FT)	DELIVERED LUMENS (PER FT)	EFFICACY (LM/W)
<b>FLUSH</b>	<b>L1</b> - LOW OUTPUT	3.3	335	100
	<b>L2</b> - STANDARD OUTPUT	5.1	507	99
	<b>L4</b> - HIGH OUTPUT	8.8	837	96
<b>1" DROP</b>	<b>L1</b> - LOW OUTPUT	3.3	360	108
	<b>L2</b> - STANDARD OUTPUT	5.1	545	107
	<b>L4</b> - HIGH OUTPUT	8.8	900	103
<b>2" DROP</b>	<b>L1</b> - LOW OUTPUT	3.3	368	110
	<b>L2</b> - STANDARD OUTPUT	5.1	557	109
	<b>L4</b> - HIGH OUTPUT	8.8	920	105

LUMEN OUTPUT ADJUSTMENT FACTORS: (27K=0.94) (30K=0.97) (35K=1.00) (40K=1.01)

EDITION 01/19





**3G-2PLI-DI**

LIGHTING 2" LINEAR DIRECT/INDIRECT - PENDANT MOUNTED

## TECHNICAL

### HOUSING

- Extruded aluminum housing with narrow 2" aperture
- Individual units and continuous runs available in 1' increments
- 24 gauge LED reflector with high reflectance white powder coated finish
- Extruded acrylic lens with a satin finish designed for optimal performance and glare control
- Lens options available in flush, 1" drop and 2" drop
- Standard polyester powder coated matte white finish. Optional finishes available

### ELECTRICAL

- Standard 0-10V, 100-1% dimming and 0.9 power factor
- Standard 120V-277V universal voltage drivers. Optional 347V 0-10V driver
- Lutron EcoSystem and eldoLED Dali options available with 100-1% dimming
- All drivers are integral and easily accessible through the aperture
- Integral Emergency Battery: 90 minutes

### LED SYSTEM

- Proprietary LED system
- Color consistency 3 SDCM
- Standard (80+CRI). Optional (90+CRI)
- Available in 27K, 30K, 35K, and 40K
- Average rated life of > 50,000 hours
- 5-year warranty

### MOUNTING

- Suitable for drywall and wood ceilings (see mounting details)
- Suitable for various grid ceilings applications (see mounting details)
- Aircraft cable suspension with adjustable locking fasteners
- All mounting canopies provided in white finish as standard

### LISTING

- ETL listed and tested to UL standards. Suitable for dry and damp locations

### WARRANTY


- 5 Year warranty on LED and drivers
- Manufacturer 1-year warranty for defects in material and workmanship under normal use
- Ambient temperature at fixture should not exceed 25°C

# 3G

## 3G-2PLI-DI


LIGHTING 2" LINEAR DIRECT/INDIRECT - PENDANT MOUNTED

### DRAWINGS AND DIMENSIONS

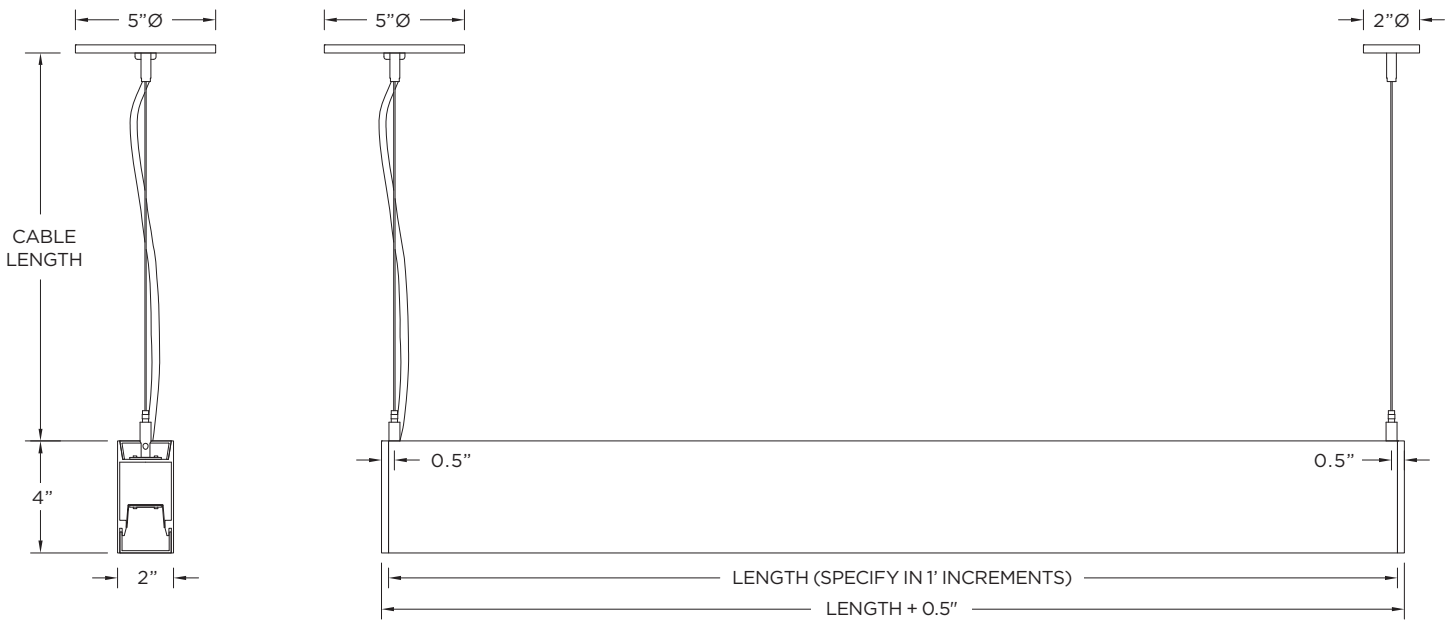


### LENS OPTIONS


**FL - FLUSH LENS**



**DD1 - 1" DROP LENS**




**DD2 - 2" DROP LENS**




### MOUNTING


**GRID POWER FEED**



**GRID NON POWER FEED**



**DRYWALL POWER FEED**



**DRYWALL NON POWER FEED**

