



Project \_\_\_\_\_


Type \_\_\_\_\_

Notes \_\_\_\_\_


**PERFORMANCE AT 4000K**

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY
4500 lm	36.67 W	123 lm/W
5000 lm	44.0 W	114 lm/W
7000 lm	62.76 W	112 lm/W
9000 lm	81.36 W	111 lm/W

Please consult factory for custom lumen output and wattage.

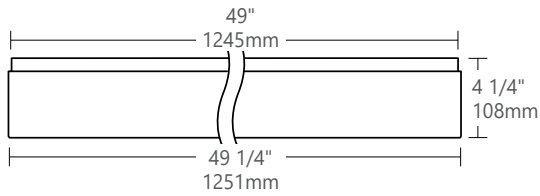

SIDE VIEW

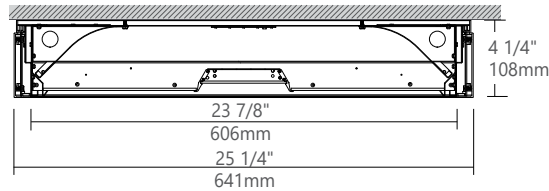

SECTION VIEW



\*Check the latest update on the DLC website for complete information. Not all versions may be DLC qualified. See page 2 for DLC Approved options



cULus Listed Type I.C.



CONTROL SENSORS



**Ordering Guide**

POLED		SIZE	NOMINAL LUMENS	CRI	COLOR TEMP.	SHIELDING	FINISH
<b>PRODUCT ID</b>	Plano LED	<b>24</b> 2'X4'	<b>4500</b> 4500 lm - Minimum <b>9000</b> 9000 lm - Maximum	<b>80</b> 80 CRI <b>90</b> 90 CRI	<b>27</b> 2700 K <b>30</b> 3000 K <b>35</b> 3500 K <b>40</b> 4000 K	<b>VL</b> VL optics	<b>W</b> white <b>BLK</b> black <b>C</b> custom
			Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.				

VOLTAGE	DRIVER	CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPTIONAL)
<b>120</b> 120 V <b>277</b> 277 V <b>347</b> 347 V <b>UNV</b> universal	<b>DP</b> dimming (0-10V) 1% <b>LT</b> Lutron <sup>(1)</sup> <b>BI</b> bi-level dimming <b>O</b> other <sup>(2)</sup>	<b>1</b> 1 circuit <b>+E(#)</b> emergency circuit <sup>(3)</sup> <b>+NL(#)</b> night light circuit <sup>(3)</sup> <b>+GTD(#)</b> generator transfer device <sup>(3)</sup>	<b>SM</b> surface mount	<b>B#</b> battery Pack
	(1) Specify system (2) Please consult factory	(3) Specify quantity		Please consult factory Not available with 347V

OTHER (OPTIONAL)	IC CONTROLS (OPTIONAL)	CUSTOM (OPTIONAL)
<b>F</b> fuse <sup>(4)</sup> <b>FW(#)</b> flex whip (6' std)	<b>DS#</b> daylight sensor <b>OS#</b> occupancy sensor <b>DOS#</b> daylight & occupancy sensor <b>EN#</b> Enlighted integral <sup>(5)</sup> <b>ENR#</b> Enlighted remote <sup>(5)</sup> <b>WC#</b> wireless control dimming	<b>C</b> custom
(4) Requires 120V or 277V	(5) Please consult factory Specify quantity. Requires 1.5" blank. See integrated controls guide for more details.	Please specify

**SPECIFY DRIVER NAME (if needed)**

**SPECIFY BATTERY NAME (if needed)**

● **SPECIFICATIONS**

<b>Housing</b>	Die formed cold rolled sheet steel (20 gauge)
<b>Central Lens Housing</b>	Extruded aluminum (0.060" nominal)
<b>Center Lens</b>	PMMA Precision formed microconical structure 92 percent transmission, cuts off glare above 55°.
<b>Side lens</b>	0.08" PMMA satin blend
<b>Reflectors</b>	Die formed cold rolled sheet steel (22 gauge)
<b>Interior Brackets</b>	Die formed cold rolled sheet steel (20 gauge)
<b>Surface Mount Kit</b>	Extruded aluminum (0.070" nominal)

● **ELECTRICAL**

<b>Lutron driver*</b>	LDE1 - EcoSystem H-Series (1%) LDE5 - EcoSystem 5-Series (5%) LTE - Hi-Lume® A-series 2Wires Forward Phase (1%) <small>*Consult factory</small>
<b>Other drivers</b>	DALI - Digital Addressable Lighting Interface DMX - Digital Multiplex LV - line voltage - Advance Mark 10 Xitanium SR - For wireless sensor
<b>Emergency</b>	Integral emergency battery pack or emergency circuit optional.
<b>Input Voltage</b>	120V, 277V, 347V, UNV.

**i** Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.


● **FINISH**

Highly reflective, matte powder coat white paint for high efficiency. Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior. Custom finishes are also available.

● **WARRANTY**

Axis lighting will warrant defective LEDs, boards, and drivers for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specifications. If defective, Axis will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Axis.

● **APPROVALS**


- Certified to UL and CSA standards 
- Meets NYC requirements
- Suitable for damp locations
- IC Rated (Insulated ceiling)

● **WEIGHT**

**Surface Mount** 42 lbs / 18.9 kg


● **CEILING SYSTEM**

**MOUNTING HOLES POSITION**

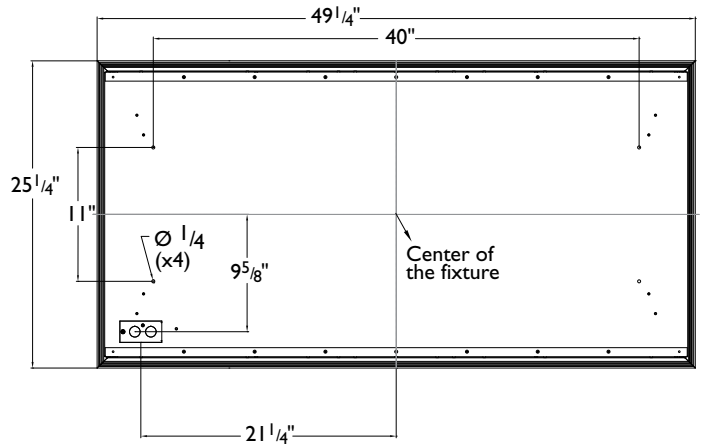

**RECESSED OPTION**


For more details see recessed specification sheets available at: [www.axislighting.com](http://www.axislighting.com)

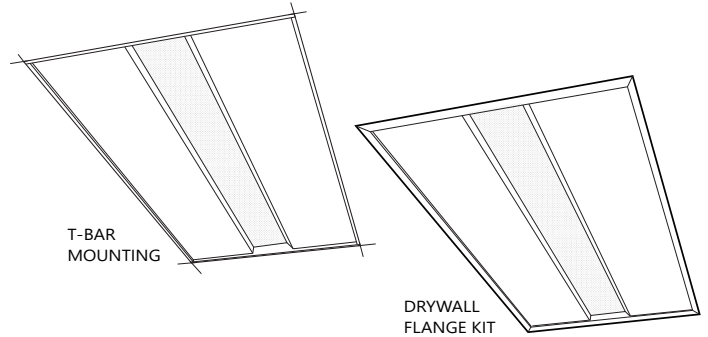

**i** Installation sheets for all mounting options are available at: [www.axislighting.com](http://www.axislighting.com)


● **STANDARD AND END MOUNT POWER FEED**

Knockouts for BX cable connection are provided both on the top and on the ends of the luminaire. This allows for an end mount power feed solution if it is required. (BX CABLE BY OTHERS)

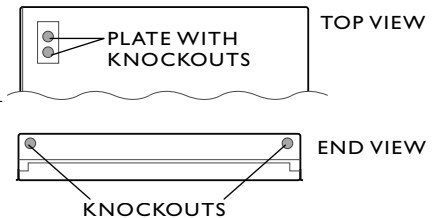


● **PHOTOMETRIC DATA**

**LED**



**PHOTOMETRIC CURVE**



**Luminaire Lumens: 4500 lm**  
**Input Watts: 36.67 W**  
**Efficacy: 123 lm/W**  
 IES FILE: POLED-24-4500-80-40-VL.ies  
 TESTED ACCORDING TO IES LM-79-2008

**CANDELA DISTRIBUTION**

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	2155	2155	2155	2155	2155	
10	2069	2068	2067	2072	2071	99
20	1814	1814	1817	1826	1830	171
30	1558	1547	1532	1511	1496	210
40	1304	1304	1280	1225	1199	223
50	850	824	804	776	729	168
60	561	540	518	495	457	122
70	361	342	324	305	277	83
80	159	163	162	142	134	41
90	0	0	0	0	0	

**COEFFICIENTS OF UTILIZATION (%)**


Ceiling	80				70				50			
	70	50	30	10	70	50	30	10	50	30	10	
Wall												
0	119	119	119	119	117	117	117	117	112	112	112	
1	110	106	102	97	107	103	100	95	99	96	92	
2	101	93	87	79	98	92	86	79	88	83	77	
3	93	83	75	67	90	81	74	66	79	73	65	
4	86	74	66	57	83	73	65	57	71	64	56	
5	79	67	59	50	77	66	58	50	64	57	49	
6	74	61	52	44	72	60	52	44	58	51	44	
7	68	56	47	39	67	55	47	39	53	46	39	
8	64	51	43	35	62	50	43	35	49	42	35	
9	60	47	39	32	59	47	39	32	45	39	32	
10	56	44	36	29	55	43	36	29	42	35	29	

Based on floor reflectance of 20


**LUMINANCE DATA (cd/m<sup>2</sup>)**

Vertical Angle	Horizontal Angles		
	0	45	90
45	2255	2177	2038
55	1719	1647	1439
65	1566	1434	1243
75	1507	1356	1145
85	713	909	1007

**LED**



**PHOTOMETRIC CURVE**



**Luminaire Lumens: 5000 lm**  
**Input Watts: 44.0 W**  
**Efficacy: 114 lm/W**  
 IES FILE: POLED-24-5000-80-40-VL.ies  
 TESTED ACCORDING TO IES LM-79-2008

**CANDELA DISTRIBUTION**

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	2394	2394	2394	2394	2394	
10	2298	2298	2297	2302	2301	109
20	2015	2015	2019	2028	2033	190
30	1731	1718	1702	1679	1662	233
40	1449	1449	1422	1361	1332	248
50	944	916	894	862	810	186
60	623	600	575	550	508	136
70	401	380	360	339	308	92
80	177	182	180	158	149	46
90	0	0	0	0	0	

**COEFFICIENTS OF UTILIZATION (%)**

Ceiling	80				70				50			
	70	50	30	10	70	50	30	10	50	30	10	
Wall												
0	119	119	119	119	117	117	117	117	112	112	112	
1	110	106	102	97	107	103	100	95	99	96	92	
2	101	93	87	79	98	92	86	79	88	83	77	
3	93	83	75	67	90	81	74	66	79	73	65	
4	86	74	66	57	83	73	65	57	71	64	56	
5	79	67	59	50	77	66	58	50	64	57	49	
6	74	61	52	44	72	60	52	44	58	51	44	
7	68	56	47	39	67	55	47	39	53	46	39	
8	64	51	43	35	62	50	43	35	49	42	35	
9	60	47	39	32	59	47	39	32	45	39	32	
10	56	44	36	29	55	43	36	29	42	35	29	

Based on floor reflectance of 20


**LUMINANCE DATA (cd/m<sup>2</sup>)**

Vertical Angle	Horizontal Angles		
	0	45	90
45	2506	2419	2264
55	1910	1830	1599
65	1740	1593	1381
75	1675	1507	1272
85	793	1010	1119


**i** All IES files are available for download at: [www.axislighting.com](http://www.axislighting.com)

### PHOTOMETRIC DATA

#### LED



#### PHOTOMETRIC CURVE



**Luminaire Lumens: 7000 lm**  
**Input Watts: 62.76 W**  
**Efficacy: 112 lm/W**  
 IES FILE: POLED-24-7000-80-40-VL.ies

TESTED ACCORDING TO IES LM-79-2008

#### CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	3352	3352	3352	3352	3352	
10	3218	3217	3215	3223	3222	153
20	2822	2822	2827	2840	2846	265
30	2423	2406	2382	2351	2326	326
40	2028	2028	1991	1905	1865	347
50	1322	1282	1251	1207	1134	261
60	872	839	805	770	712	190
70	562	532	504	474	431	129
80	248	254	252	222	209	64
90	0	0	0	0	0	

#### LUMINANCE DATA (cd/m<sup>2</sup>)


Vertical Angle	Horizontal Angles		
	0	45	90
45	3508	3387	3170
55	2675	2562	2238
65	2436	2230	1934
75	2345	2110	1780
85	1110	1414	1567

#### COEFFICIENTS OF UTILIZATION (%)


Ceiling	80				70				50			
	70	50	30	10	70	50	30	10	50	30	10	
Wall	70	50	30	10	70	50	30	10	50	30	10	
0	119	119	119	119	117	117	117	117	112	112	112	
1	110	106	102	97	107	103	100	95	99	96	92	
2	101	93	87	79	98	92	86	79	88	83	77	
3	93	83	75	67	90	81	74	66	79	73	65	
4	86	74	66	57	83	73	65	57	71	64	56	
5	79	67	59	50	77	66	58	50	64	57	49	
6	74	61	52	44	72	60	52	44	58	51	44	
7	68	56	47	39	67	55	47	39	53	46	39	
8	64	51	43	35	62	50	43	35	49	42	35	
9	60	47	39	32	59	47	39	32	45	39	32	
10	56	44	36	29	55	43	36	29	42	35	29	

Based on floor reflectance of 20

#### LED



#### PHOTOMETRIC CURVE



**Luminaire Lumens: 9000 lm**  
**Input Watts: 81.36 W**  
**Efficacy: 111 lm/W**  
 IES FILE: POLED-24-9000-80-40-

TESTED ACCORDING TO IES LM-79-2008VL.ies

#### CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	4310	4310	4310	4310	4310	
10	4137	4136	4134	4144	4142	197
20	3628	3628	3635	3651	3660	341
30	3115	3093	3063	3023	2991	419
40	2607	2607	2560	2450	2398	446
50	1699	1649	1609	1552	1458	335
60	1121	1079	1036	990	915	245
70	722	684	648	610	555	166
80	318	327	323	285	268	83
90	0	0	0	0	0	

#### LUMINANCE DATA (cd/m<sup>2</sup>)

Vertical Angle	Horizontal Angles		
	0	45	90
45	4510	4355	4075
55	3439	3294	2878
65	3133	2867	2486
75	3014	2713	2289
85	1427	1818	2014

#### COEFFICIENTS OF UTILIZATION (%)

Ceiling	80				70				50			
	70	50	30	10	70	50	30	10	50	30	10	
Wall	70	50	30	10	70	50	30	10	50	30	10	
0	119	119	119	119	117	117	117	117	112	112	112	
1	110	106	102	97	107	103	100	95	99	96	92	
2	101	93	87	79	98	92	86	79	88	83	77	
3	93	83	75	67	90	81	74	66	79	73	65	
4	86	74	66	57	83	73	65	57	71	64	56	
5	79	67	59	50	77	66	58	50	64	57	49	
6	74	61	52	44	72	60	52	44	58	51	44	
7	68	56	47	39	67	55	47	39	53	46	39	
8	64	51	43	35	62	50	43	35	49	42	35	
9	60	47	39	32	59	47	39	32	45	39	32	
10	56	44	36	29	55	43	36	29	42	35	29	

Based on floor reflectance of 20

**i** All IES files are available for download at: [www.axislighting.com](http://www.axislighting.com)